




VER	DETAIL DESCRIPTION	DATE
△	The First Amendment	2013-05-08

客户确认签名/  
Customer signature

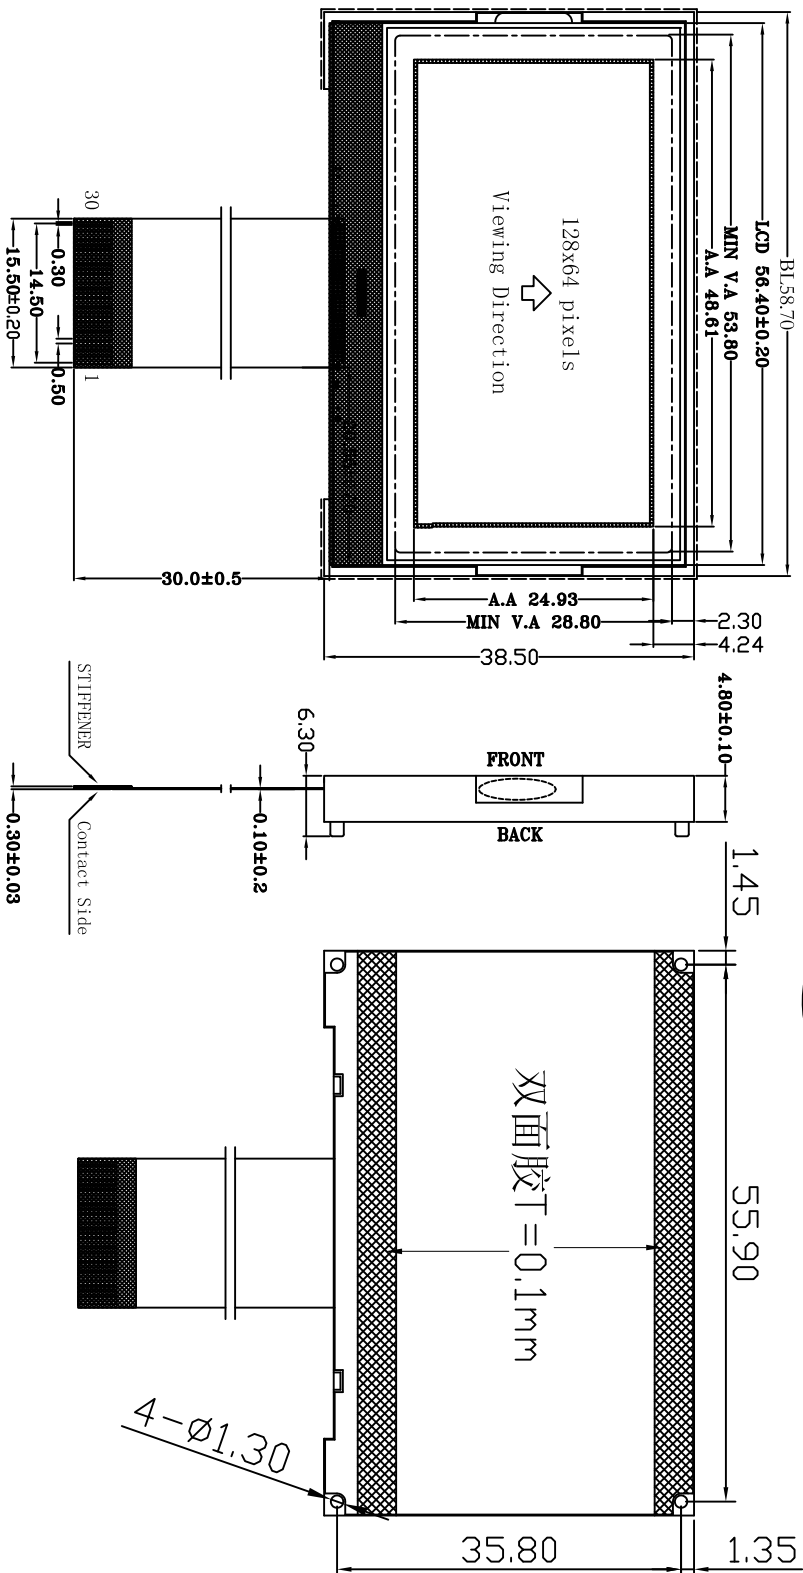

PIN ASSIGNMENT:	
1	CS TO子选信号引脚
2	R/S 复位信号引脚
3	A0 数据/指令选择引脚
4	R/W (OR) 读写信号引脚
5	RD (D) TC使能信号引脚
6	D0
7	D1
8	D2
9	D3
10	D4
11	D5
12	D6
13	D7
14	VDD 系统电源引脚
15	VSS 系统接地引脚
16	NC
17	NC
18	V0 悬空
19	X0 使用IC内部升压器的外接电容引脚
20	NC
21	NC
22	V <sub>+</sub> 使用IC内部升压器的外接电容引脚
23	NC
24	NC
25	NC
26	NC
27	NC
28	C86 选择并口时的6800/8080H时序选择引脚
29	PS 串口/并口选择引脚
30	NC 悬空

- NOTES:
- 1.DISPLAY TYPE: STN/Y-G/TRANSFLECTIVE/POSITIVE
  - 2.VIEWING DIRECTION: 6:00
  - 3.IC: ST7567
  - 4.OPERATING TEMP: -20°C~+70°C
  - 5.STORAGE TEMP: -30°C~+80°C
  - 6.Drive Method: 1/5Duty 1/9bias
  - 7.OPERATING VOLTAGE: VDD=3.3V, VLCD=9.8V
  - 8.BACK LIGHT: WITHOUT
  - 9.CONNECTOR: CDG/FPC
  - 10.UNMARKED TOLERANCES: ±0.2mm
  - 11.REQUIREMENT ON ENVIRONMENTAL PROTECTION: ROHS



名称	006工程图
编号	CYW-G12864-305B
版本	1.0
绘图	PGY
审批	WRX
日期	2013-05-08