
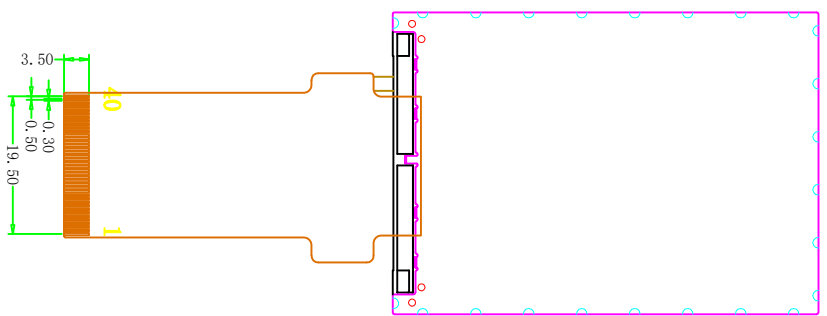


- 技术要求:
1. 带*尺寸为重点尺寸, 带()尺寸为参考尺寸
 2. LCD切割断面崩边≤1/3 (单层LCD厚度)
 3. 平面翘曲度≤0.35mm
 4. 符合RoHS指令
 5. 工作温度: -20°C~70°C
 6. 储存温度: -30°C~80°C
 7. 建议TP V. A开窗比LCD A. A单边大0.4mm
 8. 泡棉开窗比LCD A. A单边大0.3mm

背光驱动
VF=3.0±0.2V; I_F=15*6mA

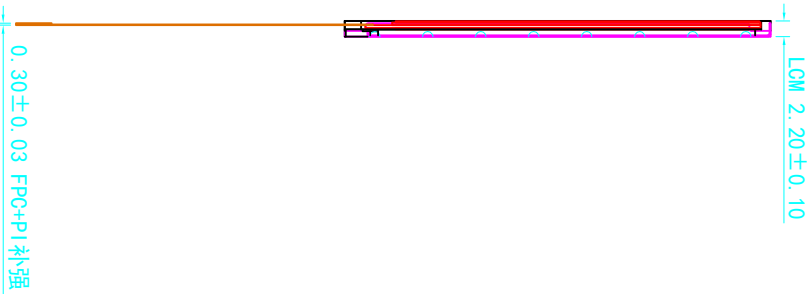

Pin#	ASSIGNMENT
1	GND
2	SDA
3	SCL
4	RST
5	INT
6	VCC

Pin	Symbol
1	V0/TP_SCL
2	X0/TP_SDA
3	V0/TP_RST
4	X0/TP_INT
5	GND
6	VCC
7	GND
8	DB1.7
9	DB1.6
10	DB1.5
11	DB1.4
12	DB1.3
13	DB1.2
14	DB1.1
15	DB1.0
16	DB9
17	DB8
18	DB7
19	DB6
20	DB5
21	DB4
22	DB3
23	DB2
24	DB1
25	DB0
26	SDA
27	R0
28	WR
29	KS
30	CS
31	RESET
32	IM0
33	IM1
34	IOVCC
35	IM2
36	A
37	K1
38	K2
39	K3
40	K4

PART DESCRIPTION	LCM	
DESIGNED		
CHECKED		
APPROVED		
DATE	2024.01.03	
DESCRIPTION	首次发行	
REV	A	

BOKOO [®] 深圳驰宇微科技有限公司	BOE2.4/TPS/ONGA
驰宇微科技 Tel:0755-29446830 web:www.cywld.com	ALL
	上抽90° / F390° 0.18MM
	S17789V
	6-LED并排/15mA

UNITS	SCALE	3rd ANGLE	SIZE
mm	1.00		A4
PART NUMBER	MODEL NAME	DRAWING REV.	PART NUMBER VER.
	TFT024B475	A	N/A

REV	SIGN	DATE
A		2024.01.03